






Shielded D-Sub Backshells DSK/DTK-SL Series

TECHNICAL SPECIFICATIONS

Material insulator:	Polycarbonate UL94 V0
Material shielding:	Zi-plated steel
Temp. range:	-40°C - 105°C
Cable strain relief:	Crimp ferrule with anchor ferrule
Cable diameter:	3.0 - 13.0 mm
Locking screws:	Integrated UNC 4-40 threads for slidelock or panel assembly
Cable outlet:	Straight or side
Attenuation factor:	> 40 dB between 30 MHz and 1 GHz

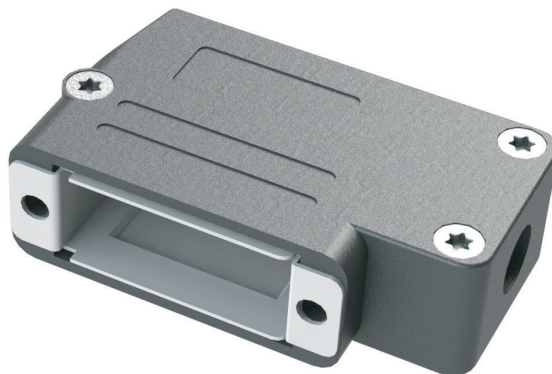

PART NUMBERING SYSTEM

DSK15 - SL - R10.6 - SR9.0/8.1 - CK - K

Series:	DSK/DTK-SL
Size:	15
Crimp ferrule:	See separate list
Anchor ferrule:	See separate list

└ Packaging:
K = Kit package
BULK = Bulk package / 100 pcs

FEATURES

- Available in size 15-way
- Crimped cable retention guarantee 360° shielding
- Accept round foil and braided cable types
- Crimp tool only extra tool required
- Company logotype available upon request
- Approved according VDE 0871, FCC 20780, IEEE 802.3 and 89/336/EU
- Integrated UNC 4-40 threads for slidelock or panel assembly
- For custom designed solutions, please consult factory