




Shielded D-Sub Backshells DTK Series

TECHNICAL SPECIFICATIONS

Material insulator:	Polycarbonate UL94 V0 (25-way) Nylon UL94 V2 (9 and 15-way)
Material shielding:	Zi-plated steel
Temp. range:	-40°C - 105°C
Cable strain relief:	Crimp ferrule with anchor ferrule
Cable diameter:	3.0 - 13.0 mm
Locking screws:	Long jackscrews with moulded top for colour coding
Cable outlet:	Top
Attenuation factor:	> 40 dB between 30 MHz and 1 GHz

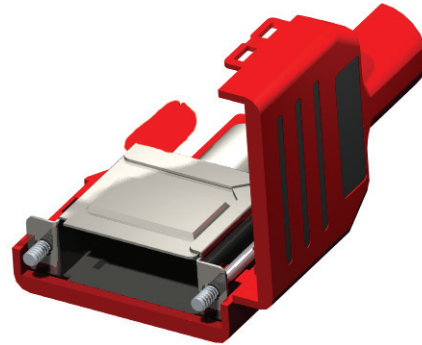

TYPE	A	B
DTPK9	34,6	33,6
DTPK15	42,8	53,6
DTPK25	54	54,3
DTPK37	74	53,6

PART NUMBERING SYSTEM

DTK25 - R10.6 - SR9.0/8.1 - - K

Series: _____
DTK
Size: _____
9, 15 or 25-way
Crimp ferrule: _____
See separate list

Packaging:
K = Kit package
BULK = Bulk / 100 pcs
Colour:
Omit = Black
Other colours available:
beige, blue, brown, green, grey,
ivory, red, white and yellow
Anchor ferrule:
See separate list

FEATURES

- Available in sizes 9, 15 or 25-way
- Crimped cable retention guarantee 360° shielding
- Accept round foil and braided cable types
- Crimp tool only extra tool required
- Company logotype available upon request
- Approved according VDE 0871, FCC 20780, IEEE 802.3 and 89/336/EU
- Long jackscrews with UNC 4-40 thread as standard, M2.5, M2.6 or M3.0 as option
- For custom designed solutions, please consult factory